

Cleaning & Maintenance


Tamco uPVC windows and doors are easy to clean & maintain due to their smooth surfaces.

No expert maintenance and cleaning is required.

Glazing

All types of glazing can be cleaned in the same way as window frames or normal window cleaners can be used.

Ensure that after cleaning, the window cleaning liquid is not left on the uPVC frames. It should be rinsed with water and wiped dry with soft cotton cloth.

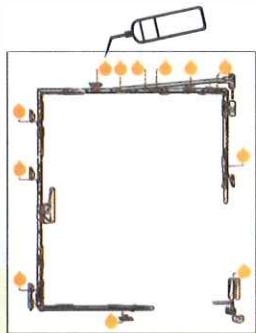

Fittings

Metal fittings, hinges, locking points and moving parts of Tamco uPVC windows & doors should be kept free from dust, dirt, debris and obstructions.

These should be cleaned periodically and lightly oiled a year.


Edpm Gaskets



Keep epdm (rubber) gaskets clean of any dirt or dust and avoid any folds to them.

If they get pulled out of their grooves, put them back; dislocated gaskets can lead to gaps, thru which air, dust, water & sound can penetrate.

Roll-Up Fly Screens

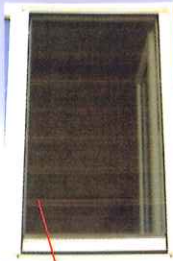

Dust

Wipe the dust particles from the fly-screen mesh (net) with damp cloth using normal household detergent or water. This can be done with a soft cleaning brush or vacuum cleaner. Fly screen channels should be cleaned periodically to remove dust/stand.

Do not allow dust to settle in side-channels of fly-screens for long, as this can hinder the operation of fly-screen. Keep fly screen rolled up when required.



Roller Shutters

Roller shutter slats, head box and side channels should be cleaned the same way as uPVC window frames.

Lot of dust is likely to settle on the slats when roller shutters are left open (down) for long time. This dust should be brushed-off before closing (lifting-up) the shutters; otherwise the accumulated dust can hinder the smooth operation of roller shutters & damage the slats.

CAUTIONS

Do not engage unqualified & in-experienced people to adjust your **Tamco** uPVC windows & Doors as they can cause damage.

Do not try to force open the struck/jammed units as this can damage the vital parts permanently.

Call for **Tamco's** well qualified, trained and experienced technicians for any assistance.




تامكو الخليج المحدودة
TAMCO Gulf Ltd

Sharjah | Abu Dhabi
Tel 06 5135 888 Fax 06 5356 690 | Tel 02 6781 173 Fax 02 6773 937
Email tamcoshj@eim.ae | Email tamcoadh@eim.ae

www.tamco.ae



تامكو الخليج المحدودة
TAMCO Gulf Ltd

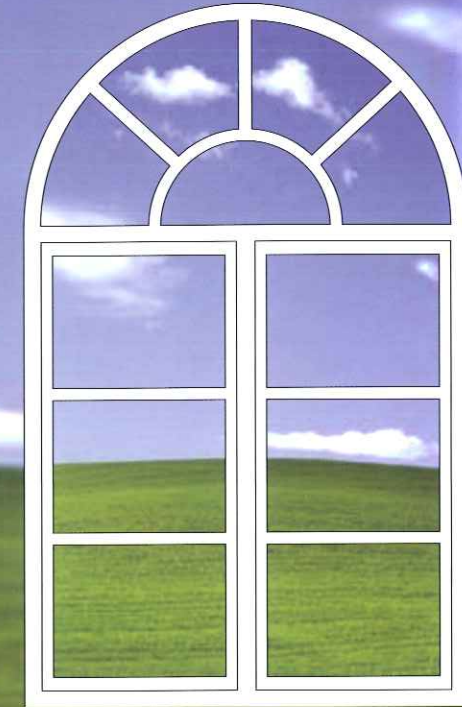


Windows^{xp}erts



OPERATING
manual

OPEN / TILT Windows



1 CLOSE

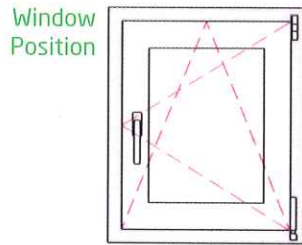

2 OPEN
(Open like Door)

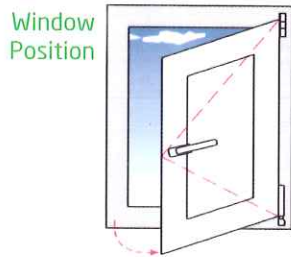


3 TILT
(Open from Top)

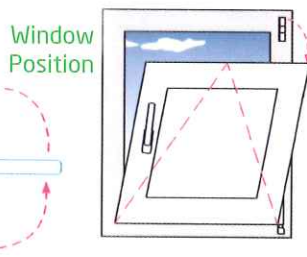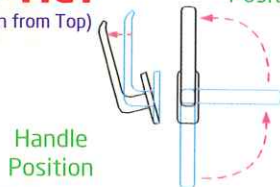


For OPEN / TILT windows Before each operation close window sash then twist the handle for next position.

TAMCO Doors


1 CLOSE

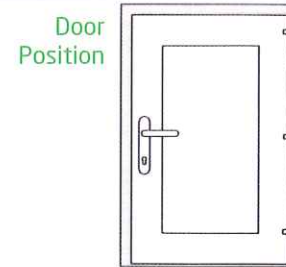

2 OPEN
(Push Door)

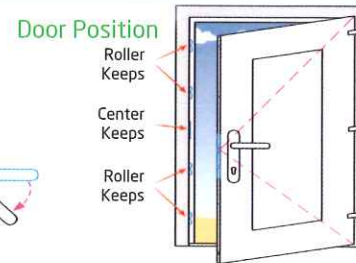


3 LOCK

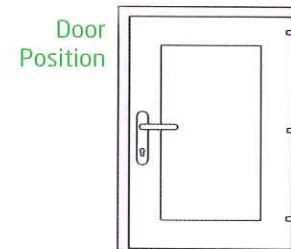



Lift Handle to engage locking points and then twist key to lock.

TILT / SLIDE Windows



1 CLOSE

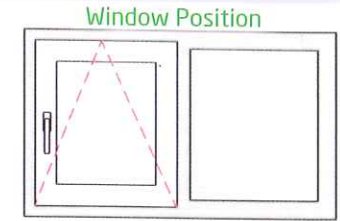

2 TILT

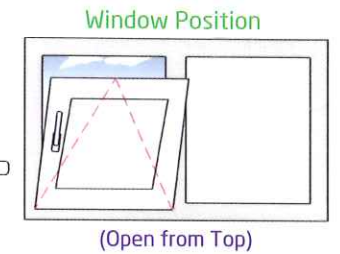

3 SLIDE

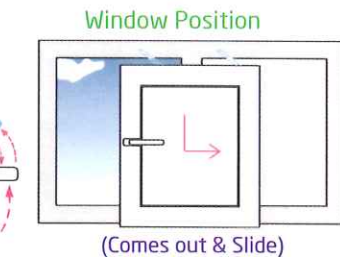

For TILT / SLIDE windows Just push back shutters (sash) to tilt position and push close.

Frames

DO's


To Clean the common dirt and dust from the surface of the frames, add normal household detergent to water and clean with soft cotton cloth. Wipe always the excess liquid and rinse with clean water and leave the surface dry.

Dirt & Dust



DON'Ts

Do not allow any cleaning liquid to remain on the surface of the frames as it build a color layer with the heat of the sun. Chemicals like Clorex, HCL, Nitro Thinners, Benzine / Acetone or products based on them should not be used for cleaning the frame surfaces.

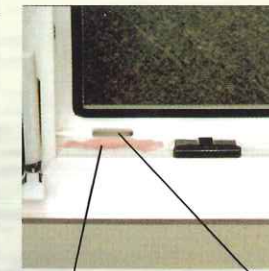

Dust / Sand

Water Drainage

Grooves, water slots and rebate of frames, must cleaned periodically to avoid dust accumulation.

Always ensure that water slot and drainage openings of the frames are not blocked by dust/sand in order to allow for the water drainage to the outside.